




AC LED Driver P/N: UA1030-350C

Feature

- Storage Temperature Range : -25 °C ~ 85 °C
- Operating Temperature Range: -10 °C ~ 65 °C


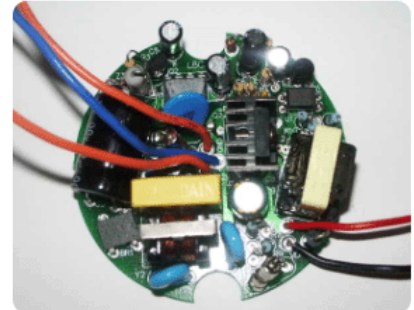


Electrical Specifications @ 25°C

PARAMETERS		MIN.	TYP.	MAX.	UNIT
INPUT	Voltage	95	~	263	Vac
OUTPUT	Voltage	5	~	50	Vf
	Constant Current	350 +/- 7.5 %			mA
	Open Circuit Voltage	38 max			Vdc

Note 1: Specifications are production tested at TA = 25 °C

EFFICIENCY VS LED Vf :

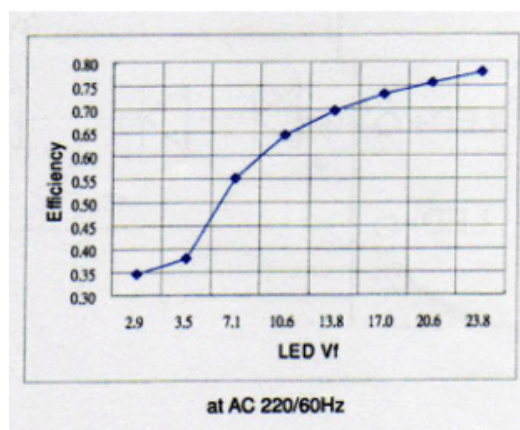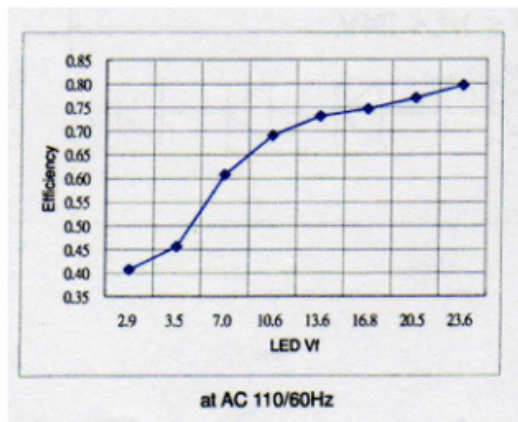



Tel:+86-20-81628973	Fax:+86-20-81628967
e-mail:sales@ceetus.com.cn	Website:www.ceetus.com.cn



CETUS INTERNATIONAL LTD.

AC LED Driver
P/N: UA1030-350C
Mechanical

Page : 2/2

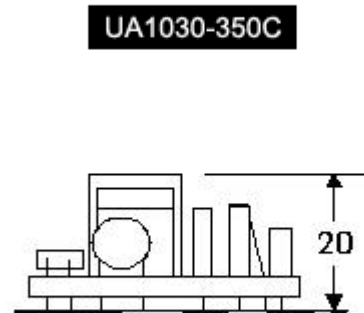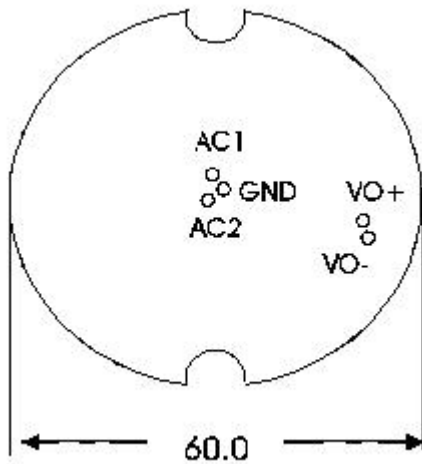

NOTE:

Datasheet Change History:

V0	2006/Sep.	Datasheet Set Up

Tel:+86-20-81628973	Fax:+86-20-81628967
e-mail:sales@ceetus.com.cn	Website:www.ceetus.com.cn